

⑪ Publication number : **0 620 270 A2**

⑫ **EUROPEAN PATENT APPLICATION**

⑲ Application number : **94302519.7**

⑤① Int. Cl.⁵ : **C11D 7/50, C11D 7/24,
C11D 3/43**

⑳ Date of filing : **11.04.94**

③① Priority : **12.04.93 US 45071**

④③ Date of publication of application :
19.10.94 Bulletin 94/42

⑧④ Designated Contracting States :
AT BE CH DE DK ES FR GB IE IT LI LU NL SE

⑦① Applicant : **Colgate-Palmolive Company**
300 Park Avenue
New York, N.Y. 10022-7499 (US)

⑦② Inventor : **Oldenhove, Louis**
Meerstraat 2
B-3870 Heks (BE)
Inventor : **Broze, Guy**
Rue Claskin 32
B-4330 Grace-Hollogne (BE)

⑦④ Representative : **Kearney, Kevin David**
Nicholas et al
KILBURN & STRODE
30 John Street
London, WC1N 2DD (GB)

⑤④ **Cleaning compositions.**

⑤⑦ The present invention relates to an aqueous cleaning composition which is useful for the removal of grease or tar without any mechanical action. In particular, the instant compositions are derived from three liquid phases which merge together at the tricritical point to form one continuum forming the aqueous cleaning composition, wherein the three phases incorporate at least a polar solvent, a non-polar solvent or weakly polar solvent and a water soluble or water low molecular weight water dispersible amphiphile.

FIELD OF THE INVENTION

The present invention relates to an aqueous, cleaning composition which is optionally surfactant-free and is useful for the removal of grease or tar without any mechanical action. In particular, the instant compositions
 5 comprise three liquid phases which merge together in the vicinity of a tricritical point to form one continuum, wherein each of the three phases essentially contain a polar solvent, a non-polar solvent or a weakly polar solvent and a water soluble or water dispersible low molecular weight amphiphile.

BACKGROUND OF THE INVENTION

Liquid aqueous synthetic organic detergent compositions have long been employed for human hair shampoos and as dishwashing detergents for hand washing of dishes (as distinguished from automatic dishwashing, machine washing of dishes). Liquid detergent compositions have also been employed as hard surface cleaners, as in pine oil liquids, for cleaning floors and walls. More recently, they have proved successful as laundry
 15 detergents too, apparently because they are convenient to use, are instantly soluble in wash water, and may be employed in "pre-spotting" applications to facilitate removal of soils and stains from laundry upon subsequent washing. Liquid detergent compositions have comprised anionic, cationic and nonionic surface active agents, builders and adjuvants including, as adjuvants, lipophilic materials which can act as solvents for lipophilic soils and stains. The various liquid aqueous synthetic organic detergent compositions mentioned above
 20 serve to emulsify lipophilic materials including oily soils in aqueous media, such as wash water, by forming micellar dispersions and emulsions.

A cleaning action can be regarded as a more-or-less complex process resulting in the removal of soils from a given surface. The driving forces generally involved in this process are mechanical energy (friction, attrition, sonification, etc.), solvation by a liquid, thermal agitation, soil-solvent interfacial tension reduction, chemical
 25 modifications (caustic, acidic, oxidative, reductive, hydrolysis, assisted or not by catalysts or enzymes), soil or soil residual suspension (e.g. in micellar solutions), and so on.

When the cleaning action takes place in water liquid vehicle, auxiliary cleaning agents, especially surfactants, are generally required to get rid of hydrophobic soils. Moreover, in most domestic cleaning tasks, the success of the cleaning mechanism is based on the reduction of the water/oil interfacial tension. The generally
 30 admitted theory is that the oily soil is easily dispersed or even solubilized in the composition because of the low interfacial tension existing between the composition and the oil.

Another explanation can be evoked. Due to the low interfacial tension, the liquid detergent composition easily diffuses through the soil or between the support and the soil, thereby weakening all bonding forces; the soil is then spontaneously removed from the substrate. This is the cause for the removal of oily soil without
 35 a real solubilization of the soil which eventually is emulsified. Both mechanisms are complementary in the cleaning process.

Although emulsification is a mechanism of soil removal, it has been recently discovered how to make microemulsions which are much more effective than ordinary emulsions in removing lipophilic materials from substrates. Such microemulsions are described in British Patent Specification No. 2,190,681 and U.S. Patent Applications Serial Nos. 06/866,029, 07/085,902, 07/120,250 and 07/267,872 most of which relates to acidic microemulsions useful for cleaning hard surface items such as bathtubs and sinks, which microemulsions are especially effective in removing soap scum and lime scale from them. In U.S. Patent Application Serial No. 07/267,872 the microemulsions may be essentially neutral and as such are also thought to be effective for microemulsifying lipophilic soils from substrates. In U.S. Patent Application Serial No. 07/313,664 there is described a light duty microemulsion liquid detergent composition which is useful for washing dishes and removing greasy deposits from them in both neat and diluted forms. Such compositions include complexes of anionic and cationic detergents as surface active components of the microemulsions.
 45

The various microemulsions referred to include a lipophile which may be a hydrocarbon, a surfactant which may be an anionic and/or a nonionic detergent(s), a co-surfactant which may be a poly-lower alkylene glycol lower alkyl ether, e.g. tripropylene glycol monomethyl ether, and water.
 50

Although the manufacture and use of detergent compositions in microemulsion form significantly improves cleaning power and greasy soil removal, compared to the usual emulsions, the present invention improves them still further by the formation of aqueous near tricritical cleaning compositions which have improved cleaning as compared to microemulsions.

The instant aqueous cleaning compositions, which are optionally surfactant-free, provide increased grease and tar removal capabilities without mechanical action as compared to the water-based microemulsions. Such water-based microemulsions all contain a surfactant as compared to the preferred surfactant-free compositions of the instant invention.
 55

In most domestic cleaning tasks, the success of the cleaning mechanism is based on reduction of the water/oil interfacial tension. In this frame, the thermodynamic of phases predict that ultra-low interfacial tensions can be reached in the direct vicinity of peculiar compositions called "critical points" and particularly near "tr-critical points," the properties of which were extensively described by Griffiths (Robert B.) Wheeler (John C.). Critical points in multicomponent systems. Phys. Rev. A, NEW YORK 1970, 2, (3), (Sept.), pp.: 1047-1064; and Griffiths (Robert B.). Thermodynamic model for tricritical points in ternary and quaternary fluid mixtures. J. Chem. Phys., LANCASTER. 1974, 60, (1), pp.: 195-206; and Widom. B. Tricritical points in three - and four - component fluid mixtures J. Phys. Chem., WASHINGTON. 1973, 77, (18), pp.: 2196-2200; and Widom (B.) Interfacial tensions of three fluid phases in equilibrium. J. Chem. Phys. Lancaster, 1975, 62 (4) pp: 1332-13360 and Lang (J. C.) Widom (B.) Equilibrium of three liquid phases and approach to the tricritical point in benzene-ethanol-water-ammonium sulphates mixtures. Physics A, AMSTERDAM. 1975. 81A. pp.: 190-213; and Widom (B.) Three-phase equilibrium and the tricritical point. Kinan, MEXICO. 1981, 3, A, pp.: 143-157

It must be pointed out that, in such critical compositions, surfactants are not essential. Moreover, it is not absolutely essential to be right at a tricritical point to obtain surface tensions much lower than those currently achieved with today's cleaning systems.

It is worthwhile to note that the tricritical points theory has already been under high scrutiny in view of enhancing oil recovery. These works are extensively described by Fleming (P. D.) Vinatieri (J. E.). Phase behavior of multicomponent fluids. J. Phys. Chem., WASHINGTON. 1977, 66, (7), pp.: 3147-3154 and Vinatieri (James E.) Fleming (Paul D.). Use of pseudocomponents in the representation of phase behavior of surfactant systems. Soc. Pet. Eng. J., DALLAS, 1979, 19, pp.: 289-300; and Fleming (Paul D.) Vinatieri (James E.). Quantitative interpretation of phase volume behavior of multicomponent systems near critical points. AIChE J., NEW YORK 1979, 25, (3), pp.: 493-502; and Fleming (Paul D.) Vinatieri (James E.). Role of critical phenomena in oil recovery systems employing surfactants. J. Colloid Interface Sci., NEW YORK. 1981, 81, (2), pp.: 319-331; and Vinatieri (James) Fleming (Paul D.). Multivariate optimization of surfactant systems for tertiary oil recovery. Soc. Pet. Eng. J., DALLAS. 1981, (2), pp.: 77-88; and Smith (Duane. H.). Interfacial tensions near the tricritical points of classical liquids: experimental evidence for the validity of the prediction of critical scaling theory. J. Chem. Phys., LANCASTER 1986, 85, PP.: 1545-1558. and Smith (Duane H.). Tricritical points as an aid to the design of surfactants for low-tension enhanced oil recovery. AOSTRA J. Res., EDMONTON(Alberta) 1984, (4), pp: 245-265.

In 1926, Kohnstamm raised the theoretical possibility of a critical point "of the second order" in a ternary liquid mixture, a point at which three co-existing fluid phases merge and become identical, Kohnstamm (Ph.). Handbuch der physik, 1926, Vol. 10, Kap. 4. Thermodynamik der Gemische, pp. 270-271, H. Geiger and K. Scheel (SPRINGER, BERLIN). Kohnstamm also stressed the extreme difficulty to find such a point.

The aqueous cleaning near tricritical point compositions of the instant invention are applicable for use in concentrated household care products and personal care products. The near tricritical point compositions of the instant invention comprise harmless ingredients. The instant near tricritical point compositions permit the preparation of super concentrated cleaning or conditioning liquid products which are optionally surfactant-free.

In accordance with the present invention, a near tricritical point cleaning composition, suitable at room temperature or colder or at a higher temperature for pre-treating and cleaning materials soiled with a lipophilic soil, comprises a polar solvent such as water, a water soluble or dispersible low molecular weight amphiphile, and a non-polar solvent, or weakly polar solvent wherein the three phases have merged into one continuum at the tricritical point. The invention also relates to processes for treating items and materials soiled with soils such as lipophilic soil, with compositions of this invention, to loosen and to remove without mechanical action such soil by applying to the locus of such soil on such material a soil loosening or removing amount of the tricritical point compositions of the instant invention.

The instant aqueous cleaning composition exists at or in the direct vicinity of the tricritical point which is the terminus of three lines of critical points. The tricritical point is a thermodynamical point at which all three co-existing phases become identical simultaneously. At the tricritical point, the interfacial tension between the merging phases of the polar solvent (water) and the low molecular weight amphiphile is substantially zero, and the interfacial tension between the merging phases of the low molecular weight amphiphile and non-polar solvent (oil) or a weakly polar solvent is substantially zero, and the interfacial tension between the polar solvent and the non-polar or weakly polar solvent is substantially zero. Accordingly, the cleaning mechanism of the cleaning compositions of the instant invention is based on the reduction of the polar solvent/non-polar solvent interfacial tension as it approaches the value of zero.

The compositions of the instant invention have a phase inversion temperature (PIT) of about 0 to about 80°C, more preferably about 15 to about 40°C. The phase inversion temperature is the temperature at which there is an equal affinity of the low molecular weight amphiphile for water and for oil. It is the temperature at which the partition of the low molecular weight amphiphile between the water rich phase and the non-polar

solvent phase or weakly polar solvent phase equals unity. That is, the weight fraction of the low molecular weight amphiphile in the water rich phase is equal to the weight fraction of the low molecular weight amphiphile in the non-polar solvent phase.

The tricritical point compositions preferably have

$$\begin{aligned} \text{a ratio (a)} &= \frac{\text{wt \% of oil}}{\text{wt \% of water} + \text{wt \% of oil} + \text{wt. \% of additives}} \\ \text{and a ratio (g)} &= \frac{\text{wt \% of low molecular weight amphiphile}}{100 \text{ wt \% of composition}} \\ \text{and a ratio (e)} &= \frac{\text{wt \% of additive}}{\text{wt \% of water} + \text{wt. \% of additive}} \end{aligned}$$

wherein the weight fraction of the water is equal to (1-g) (1-a) (1-e) and a is about 0.1 to about 0.9, more preferably about 0.3 to about 0.7, g is about 0.1 to about 0.6, more preferably about 0.2 to about 0.4, and e is about 0 to about 0.5, more preferably about 0.05 to about 0.25, wherein the additive is a water soluble additive, a polar co-solvent or an electrolyte.

The additives are water soluble molecules (electrolytes or organics) that are able to modify the structure of water so as to strengthen or disrupt the solvent structure. Addition of such chemicals will therefore modify the solubility of uncharged organic ingredients in water and, among others, of amphiphilic molecules. The above chemicals are divided into two classes: Salting-out (or kosmotropic) agents reinforce the structure of water and make it less available to hydrate organic molecules. (Salting-out and -in agents are also referred to as lyotropes and hydrotropes, respectively.) Salting-in (or chaotropic) agents, on the other hand, disorder the structure of water, thereby creating an effect comparable to "holes." As a consequence they increase the solubility of polar organic molecules in water.

In practice, lyotropic agents make water more incompatible with both oil and amphiphile. The result is a decrease of the PIT and an increase of the supercritical character. The amount of low molecular weight amphiphile needed to "congregate" water and oil generally increases in the presence of salting-out agents. Hydrotropic agents have the opposite effects.

SUMMARY OF THE INVENTION

The instant invention relates to an aqueous near tricritical point composition having an apparent viscosity at 10^2 sec^{-1} of about 1 to about 1,000 cps, more preferably about 1 to about 100 cps, and a surface tension of about 10 to about 35 mN/m, which comprises approximately by weight 15 to 85 wt % of a polar solvent; 15 to 55 wt % of a non-polar solvent or a weakly polar solvent, and about 5 to about 60 wt % of water soluble or water dispersible low molecular weight amphiphile.

Accordingly, it is an object of the instant invention to provide an aqueous tricritical point cleaning composition which is useful in a cleaning operation without or with a minimum of mechanical action for the removal of grease and tar and especially for the penetration of the near tricritical composition into a porous surface thereby destroying the adhesion of soil to the substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 through 2 illustrate phase diagrams for the aqueous tricritical point compositions C and D of Example I.

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to an aqueous near tricritical point composition having an apparent viscosity at 10^2 sec^{-1} and 25°C of about 0.2 to about 1,000 cps, more preferably about 1 to about 100 cps, and a surface tension of about 10 to about 35 mN/m, which comprises approximately by weight:

- a) 15 to 55% of a non-polar solvent or a weakly polar solvent or mixtures thereof, more preferably 25 to 50% and most preferably 30 to 45%;
- b) 5 to 60%, more preferably 10 to 50% and most preferably 15 to 40%, of a water soluble or water low molecular weight dispersible amphiphile;
- c) 15 to 55%, more preferably 20 to 40% and most preferably 25 to 35%, of a polar solvent, wherein the composition is optionally surfactant-free; and
- d) 0 to 20%, more preferably 0.5 to 15% and most preferably 1.0 to 10% of a water soluble additive.

The aqueous near tricritical point compositions of the instant invention can be used as a basic formulation for the production of both commercial and industrial applications by the incorporation of selective ingredients

in the tricritical point composition. Typical compositions which can be formed for a variety of applications are oral compositions, cosmetics, hand creams, facial creams, eye shadows, lipsticks, metal polish agents, fabric cleaners, shampoos, floor cleaners, cleaning pastes, tile cleaners, bath tub cleaners, bleach compositions, ointments, oven cleaners, stain removers, fabric softeners, bleach pre-spotters, dishwashing prespotters, au-
 5 tomatic dishwashing compositions, laundry pre-spotters, pharmaceutical compositions, coal slurries, oil drill-
 ing muds, and cleaning pre-spotters and graffiti or paint removers, mildew cleaner for grouts, flux removers
 for printed circuit boards, engine cleaners and degreasers, deinking compositions for printing machines and
 shoreline cleaners for shorelines contaminated by spilled crude oil as well as any composition containing an
 active ingredient which active ingredient has to be delivered into a cavity or a porous surface for either a clean-
 10 ing mechanism or for the delivery of a medical use for medical treatment such as in treatment of oral diseases.

The present invention relates to a liquid cleaning composition which is optionally surfactant-free having a
 surface tension of about 10 to about 35 mN/m at 25°C deriving from three co-existing liquid phases which are
 almost chemically identical to each other and the three co-existing liquid phases have merged together into
 one continuum to form the composition, wherein the first phase has the most polar solvent, the second phase
 15 has the most water soluble or water dispersible amphiphile and the third phase has the most non-polar solvent
 or weakly polar solvent and the interfacial tension between said first phase and said second phase is 0 to about
 1×10^{-3} mN/m and the interfacial tension between the second phase and the third phase is 0 to about 1×10^{-3}
 mN/m, and the interfacial tension between the first phase and the third phase is 0 to about 1×10^{-3} mN/m.

In a preferred composition, the polar solvent is water at a concentration of about 15 to about 85 wt %, the
 20 low molecular weight amphiphile is an organic compound having a water insoluble hydrophobic portion which
 has a partial Hansen polar parameter and hydrogen bonding parameter, both of which are less than about 5
 $(\text{MPa})^{1/2}$, and a water soluble hydrophilic portion which has a partial Hansen hydrogen bonding solubility para-
 meter greater than about 10 $(\text{MPa})^{1/2}$; and the amphiphile is present at a concentration of about 5 to about 60
 wt%; and the non-polar solvent or weakly polar solvent has a Hansen dispersion solubility parameter greater
 25 than about 10 $(\text{MPa})^{1/2}$ and a Hansen hydrogen bonding solubility parameter of less than about 15 $(\text{MPa})^{1/2}$,
 and is present at a concentration of about 15 to about 55 wt %.

The main characteristic of the polar solvent is that preferably it has the ability to form hydrogen bonding
 with the low molecular weight amphiphile. The polar solvent preferably has a dielectric constant of higher than
 35. Besides water, other polar solvents suitable for use in the instant composition are formamide, glycerol, gly-
 30 col and hydrogen peroxide and mixtures thereof. The aforementioned polar solvents can be mixed with water
 to form a mixed polar solvent system. The concentration of the polar solvent such as water in the near tricritical
 point composition is about 15 to 55 wt %, more preferably about 20 to about 40 wt %.

The organic non-polar or weakly polar solvent component of the present aqueous near tricritical point com-
 positions includes solvents for the soils, is lipophilic, and is a suitable oil such as a non-polar oil which is pre-
 35 ferably an aliphatic hydrocarbon of about 5 to about 25 carbon atoms and preferably has the formula $\text{C}_n\text{H}_{2n+2}$,
 wherein n is 5 to 25, more preferably 6 to 16. Such an aliphatic hydrocarbon is desirably a normal paraffin or
 an isoparaffin and, of these, those which are saturated and of 6 to 16 carbon atoms are preferred, with iso-
 paraffins of 8 to 18 carbon atoms being also preferred. The most preferred aliphatic hydrocarbon solvent is
 decane. The non-polar solvent or weakly polar solvent preferably has a Hansen dispersion solubility parameter
 40 at 25°C of at least 10 $(\text{MPa})^{1/2}$, more preferably at least about 14.8 $(\text{MPa})^{1/2}$, a Hansen polar solubility parameter
 of less than about 10 $(\text{MPa})^{1/2}$ and a Hansen hydrogen bonding solubility parameter of less than about 15
 $(\text{MPa})^{1/2}$. In the selection of the non-polar solvent or weakly polar solvent, important parameters to be consid-
 ered are the length and configuration of the hydrophobic chain, the polar character of the molecule as well as
 its molar volume.

The non-polar solvent or weakly polar solvent, which at 25°C is preferably less than 5 wt % soluble in water,
 may be selected from the group consisting essentially of alkanes and cycloalkanes having about 5 to about
 25 carbon atoms, more preferably about 6 to about 16 carbon atoms; aryl alkyls having about 12 to 24 carbon
 atoms; terpenes having about 10 to about 40 carbon atoms, more preferably about 10 to about 30 carbon atoms;
 and esters having the formula:



55 wherein R and R_1 are alkyl groups having together about 7 to about 24 carbon atoms, more preferably about
 8 to about 20 carbon atoms. Some typical non-polar solvents or weakly polar solvents are hexadecane, tet-
 radecane, phenyl hexane, decylacetate, 2-undecanone, limonene, diethylene glycol monohexyl ether, disopro-

pyl adipate, cetyl lactate and dioctyl malate, and mixtures thereof.

The concentration of the non-polar solvent or weakly polar solvent in the near tricritical point composition is preferably about 15 to about 55 wt %, more preferably about 25 to about 40 wt %.


The concentration of the low molecular weight amphiphile in the near tricritical point composition is preferably about 5 to about 60 wt %, more preferably about 15 to about 40 wt %.

The low molecular weight amphiphile of the instant composition is a molecule composed of at least two parts which is capable of bonding or at least having an affinity with the polar solvent and the non-polar solvent. Increasing the molecular weight of the low molecular weight amphiphile increases its water/oil coupling ability which means less low molecular weight amphiphile is needed to couple the polar solvent and the non-polar solvent or weakly polar solvent. At least one part is essentially hydrophobic, with a Hansen partial polar and hydrogen bonding solubility parameters less than 5 (MPa)^{1/2}. At least one part is essentially water soluble, with Hansen partial hydrogen bonding solubility parameter equal or greater than 10 (MPa)^{1/2}.

To identify the hydrophilic and hydrophobic parts, the low molecular weight amphiphilic molecule (amphiphile) must be cut according to the following rules: The hydrophobic parts should not contain any nitrogen or oxygen atoms; the hydrophilic parts generally contain the hetero-atoms including the carbon atoms directly attached to an oxygen or nitrogen atom.


Group	MW	d _d	d _p	d _H
-CH ₂ -OH	31	15.5	16.1	25.4
-CH ₂ -NH ₂	30	13.8	9.3	16.7
-CO-NH ₂	44	13	14.1	13.4
-CH ₂ -NH-CO-NH ₂	73	13.7	11.4	13.6
-CH ₂ -EO-OH	75	14.9	3.1	17.5
-CH ₂ -EO ₂ -OH	119	14.8	2.6	14.8
-CH ₂ -EO ₃ -OH	163	14.7	2.1	13.3
-CH ₂ -EO ₄ -OH	207	14.7	1.9	12.4
-COO-CH ₃	59	13.7	8.3	8
-CO-CH ₃	43	16.5	17.9	6.8
-C ₃ H ₇	43	13.7	0	0
-C ₄ H ₉	57	14.1	0	0
-C ₁₀ H ₂₁	141	15.8	0	0

This table shows the solubility parameters for different groups. The first series of eight groups can be used as the hydrophilic part of an amphiphile molecule, as the hydrogen bonding solubility parameter is always greater than 10. The last group of three groups can be used as the hydrophobic part of an amphiphile, as their polar and hydrogen bonding solubility parameters are below 1. The group of two in the middle (esters and ketones) cannot be used as a significant contribution to an amphiphile molecule. It is noteworthy that amphiphiles can contain ketone or ester functions, but these functions do not contribute directly to the amphiphile performance. d_d is the Hansen dispersion solubility parameter as measured at room temperature; d_p is the Hansen polar solubility parameter as measured at room temperature; d_H is the Hansen hydrogen bonding solubility parameter as measured at room temperature. In particular preferred low molecular weight amphiphiles, which are preferably present at a concentration of about 5 to about 60 wt %, more preferably about 15 to about 40 wt %, are selected from the group consisting essentially of polyoxyethylene derivatives having the formula:



wherein x and/or y is 1 to 6, more preferably 1 to 6, polyols having 4 to 8 carbon atoms, polyamines having 5 to 7 carbon atoms, polyamides having 5 to 7 carbon atoms, alkanols having 2 to 4 carbon atoms and alkylene glycol alkyl ethers having the formula:

5

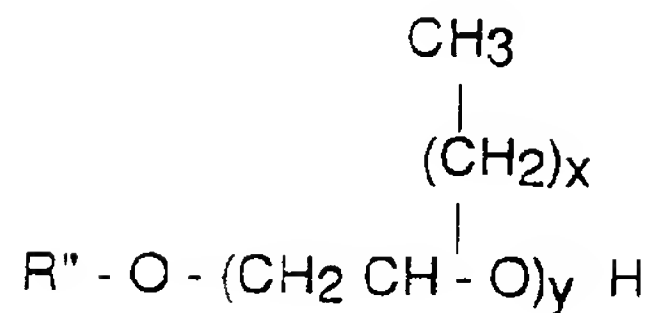

10

wherein R'' is an alkylene group having about 1 to about 8 carbon atoms and x is 0 to 2 and y is about 1 to about 5. The molecular weight of the low molecular weight amphiphile is about 76 to about 300, more preferably about 100 to about 250. Especially preferred low molecular weight amphiphiles are propylene glycol n-butyl ether, tripropylene glycol n-butyl ether, propylene glycol t-butyl ether, propylene glycol methyl ether, hexanediol, diethylene glycol monobutyl ether, triethylene glycol monohexyl ether and tetraethylene glycol monohexylether and mixtures thereof such as propylene glycol n-butyl ether and propylene glycol methyl ether in a ratio of about 2:1 to about 1.5:1.

15

The near tricritical point compositions formed from the previously described low molecular weight amphiphiles are surfactant free because these previously described low molecular weight amphiphiles are not classified as surfactants.

20

However, near tricritical point compositions can be optionally formed from a polar solvent, a non-polar or weakly polar solvent and a surfactant on a mixture of a low molecular weight amphiphile and surfactant, when the surfactant is employed without a low molecular weight amphiphile, the surfactant is present in the composition at a concentration of about 5.0 to about 25.0 wt. percent. When the surfactant is employed in the composition with the low molecular weight amphiphile the concentration of the surfactant is about 0.1 to about 25 weight percent and the concentration of the low molecular weight amphiphile is about 5 to about 60 wt. percent. The surfactants that are employed in the instant invention are selected from the group consisting of nonionics, anionics, amine oxides, cationics and amphoteric surfactants and mixtures thereof. When the surfactant is used alone and without a low molecular weight amphiphile the surfactant must preferably have an HLB of about 7 to 14. It is to be understood that surfactants are a subset of the set of amphiphiles. The low molecular weight amphiphiles do not form aggregates at an interface for example, the interface of oil and water, but rather the low molecular weight amphiphile is evenly distributed throughout the solution. Whereas a surfactant is prone to concentrate at the interfaces between different phases (air/liquid; liquid/liquid; liquid/solid) thereby forming aggregates at the interface and decreasing the interfacial tension between the above coexisting phases. For example a surfactant will form aggregates at an oil/liquid interface and the surfactant will not be evenly distributed throughout the solution.

30

35

The instant compositions can also optionally include besides the polar solvent, the non-polar or weakly polar solvent and the water dispersible amphiphile, a water soluble acid at a concentration of about 0.1 to 15.0 wt. percent, more preferably about 1 to 10 wt. percent.

40

45


The active acidic component of the near tricritical point composition can optionally be a carboxylic acid which is strong enough to lower the pH of the near tricritical point composition to the range of one to four. Various carboxylic acids can perform this function, but those which have been found effective to remove soap scum and lime scale from bathroom surfaces, while still not destabilizing the composition, are polycarboxylic acids, and of these the dicarboxylic acids are preferred. Of the dicarboxylic acids group, which includes those of 2 to 10 carbon atoms, from oxalic acid through sebacic acid, suberic, azelaic and sebacic acids are of lower solubilities and therefore are not as useful in the present near tricritical point composition as the other dibasic aliphatic fatty acids, all of which are preferably saturated and straight chained. Oxalic and malonic acids, although useful as reducing agents too, may be too strong for delicate hard surface cleanings. Preferred such dibasic acids are those of the middle portion of the 2 to 10 carbon atom acid range, succinic glutaric, adipic and pimelic acids, especially the first three thereof, which fortunately are available commercially, in mixture. The diacids, after being incorporated in the invented near tricritical point composition may be partially neutralized to produce the desired pH in the near tricritical point composition for greatest functional effectiveness with safety.

50

Phosphoric acid is one of the additional acids that helps to protect acid-sensitive surfaces being cleaned with the present compositions. Being a tribasic acid, it too may be partially neutralized to obtain a composition pH in the desired range. For example, it may be partially neutralized to the biphosphate, e.g., NaH_2PO_4 , or $\text{NH}_4\text{H}_2\text{PO}_4$.

55

Phosphonic acid, the other of the two additional acids for protecting acid-sensitive surfaces from the dissolving action of the dicarboxylic acids of the present compositions, apparently exists only theoretically, but its derivatives are stable and are useful in the practice of the present invention. Such are considered to be phosphonic acids, as that term is used in the specification. the phosphonic acids are of the structure:



5

wherein Y is any suitable substituent, but preferably Y is alkylamino or N-substituted alkylamino. For example, a preferred phosphonic acid component of the present compositions is aminotris-(methylenephosphonic) acid, which is of the formula $\text{N}(\text{CH}_2\text{PH}_2\text{O}_3)$. Among other useful phosphonic acids are ethylenediamine tetra-(methylenephosphonic) acid, hexamethylenediamine tetra-(methylenephosphonic) acid, and diethylenetriamine penta-(methylenephosphonic) acid. Such class of compounds may be described as aminoalkylenephosphonic acids containing in the ranges of 1 to 3 amino nitrogens, 3 or 4 lower alkylenephosphonic acid groups in which the lower alkylene is of 1 or 2 carbon atoms, and 0 to 2 alkylene groups of 2 to 6 carbon atoms each, which alkylene(s) is/are present and join amino nitrogens when a plurality of such amino nitrogens is present in the aminoalkylene phosphonic acid. It has been found that such aminoalkylenephosphonic acids which also may be partially neutralized at the desired pH of the near tricritical point composition, are of desired stabilizing and protecting effect in the invented cleaner, especially when present with phosphoric acid, preventing harmful attacks on European enamel surfaces by the diacid(s) components of the cleaner. Usually the phosphorus acid salts, if present, will be mono-salts of each of the phosphoric and/or phosphonic acid groups present.

Of all the organic acids which are of sufficient acidity effectively to attack soap scum and to convert it to a form which is readily removable from hard surfaces, such as ceramic tiles, Portland cement and acrylic latex grouts between the tiles, porcelain, porcelain enamel, glass, fiberglass and metal (such as chrome and nickel plated) surfaces, glutaric acid or a partially neutralized salt or ionized form thereof is highly preferred, because it performs effectively and has no significantly detrimental negative properties, but in some instances other acids capable of converting calcium and magnesium higher fatty acid soaps to acidic or partially neutralized form to assist in removing them from hard surfaces which they are staining (in the form of soap scum) may also be employed (when detrimental properties thereof, if any, are tolerable). Such acids will include those which do not form water insoluble calcium salts. For example, acetic acid, succinic acid, proionic acid and citric acid may be utilized in some circumstances. However, citric acid is a sequestering acid and tends to remove calcium from calcium carbonate in the grout employed between adjacent ceramic tiles, which is detrimental to its use, and the other mentioned acids are often unsatisfactory because of unacceptable odors and/or because they result in human nasal and/or respiratory irritation. Of course, those acids which are toxic under the circumstance of use will also preferably be avoided. Therefore, glutaric acid is preferably utilized as such soap scum attacking acid. It may be (and usually is) subsequently partially neutralized to the desired pH range during manufacture of the invented cleaner but it is also within the invention to employ salts of such acid and to convert them to the desired pH, it being recognized that the products of both such operations are the same. Therefore, by reference to "partially neutralized glutaric acid" it is meant also to include such products resulting from partially acidifying glutaric acid salts (glutarates) or from directly incorporating the partially neutralized glutarates of desired pH with the other components of the cleaner.

The instant composition can optionally contain about 0.1 to about 15 wt %, more preferably about 1 to about 5 wt % of a water soluble chaotropic additive which can be hydrotropic or kosmotropic. A hydrotropic agent weakens (salting-in effect) the structure of the water thereby making the water an improved solvent for the amphiphile, whereas a kosmotropic (lyotropic) agent strengthens (salting-out effect) the structure of the water thereby making water less of a solvent for the amphiphile. Typical hydrotropic agents are acetic acid, ethanol, isopropanol, sodium benzoate, sodium toluene sulfonate, sodium xylene sulfonate, ethylene glycol, propylene glycol, metal salts of iodide, metal salts of thiocyanates, metal salts of perchlorates, guanidinium salts. The use of the chaotropic additive can change the weight percentage of the polar solvent, amphiphile and non-polar solvent needed to form the near tricritical point composition.

In addition to the recited components of the aqueous near tricritical point compositions of the present invention, there may also be present adjuvant materials for dental, dishwashing, laundering and other detergency applications, which materials may include: foam enhancing agents such as lauric or myristic acid diethanolamide; foam suppressing agents (when desired) such as silicones, higher fatty acids and higher fatty acid soaps; preservatives and antioxidants such as formalin and 2,6-ditert-butyl-p-cresol; pH adjusting agents such as sulfuric acid and sodium hydroxide; perfumes; and colorants (dyes and pigments).

The aqueous near tricritical point compositions can be used in forming cleaning compositions containing enzymes and/or bleachants such as fabric detergent compositions or automatic dishwashing compositions which can contain bleachants, at least one enzyme, and a suitable phosphate or non-phosphate builder system.

A typical cleaning composition comprises:

5	H ₂ O		19.24%
	Na Benzoate		1.0%
	Triethylene glycol	32.5%	
	hexylether		
10	Heptylacetate		35.44%
	Nonylacetate		11.81%

The variations in formulas of compositions within the invention which are in the tricritical or near tricritical state are easily ascertainable, and the invention is readily understood when reference is made to this specification, including the working examples thereof, taken in conjunction with the phase diagrams.

Figures 1-2 are phase diagrams of compositions C and D of example 1, wherein 13 designates the tricritical point compositions. For illustration, the composition at point 23 marked by an "x" on Figure 1 comprises 56.25 wt. % of a 5% Na benzoate solution in water, 25 wt. % of triethyleneglycol monohexyl ether and 18.15 wt. % of oil (mixture of heptylacetate/nonylacetate 3:1 ratio).

In the previous description of the components of the invented compositions and proportions thereof which may be operative, boundaries were drawn for preferred compositions within the invention, but it will be evident that one seeking to manufacture the invented near tricritical point compositions will select proportions of components indicated by the phase diagrams for the particular compositions, so that the desired compositions will be within the near tricritical area. Similarly, the tricritical point compositions selected should be such that upon contact with water, the lipophilic soil will be removed from a substrate.

For plotting of the phase diagrams and in experiments undertaken by the inventors to establish the formulas of the desired tricritical point compositions, many different compositions within the invention were made and were characterized.

To make the near tricritical point compositions of the invention is relatively simple because they tend to form spontaneously with little need for the addition of energy to promote transformation of the tricritical state. However, to promote uniformity of the composition, mixing will normally be undertaken and it has been found desirable, but not compulsory, to first mix the amphiphile and water together, followed by admixing of the non-polar solvent or weakly solvent component. It is not usually necessary to employ heat and most mixings are preferably carried out at about 20-25°C or higher.

Pre-spotting and manual cleaning uses of the invented near tricritical point compositions are uncomplicated, requiring no specific or atypical operations. Thus, such near tricritical point compositions may be employed in the same manner as other liquid pre-spotting and detergent compositions.

The invented near tricritical point compositions may be applied to such surfaces by pouring onto them, by application with a cloth or sponge, or by various other contacting means, but it is preferred to apply them, depending on their viscosity, in the form of a spray by spraying them onto the substrate from a hand- or finger-pressure operated sprayer or squeeze bottle. Such application may be applied onto hard surfaces such as dishes, walls or floors from which lipophilic (usually greasy or oily) soil is to be removed, or may be applied onto fabrics such as laundry which has previously been stained with lipophilic soils such as motor oil. The invented compositions may be used as detergents and as such may be employed in the same manner in which liquid detergents are normally utilized in dishwashing, floor and wall cleaning, and laundering, but it is preferred that they are employed as pre-spotting agents too, in which applications they are found to be extremely useful in loosening the adhesions of lipophilic soils to substrates, thereby promoting much easier cleaning with application of more of the same invented detergent compositions or by applications of different commercial detergent compositions in liquid, bar or particulate forms.

Example I

The following examples illustrate but do not limit the invention. Unless otherwise indicated, all parts in these examples, in the specification and in the appended claims are by weight percent and all temperatures are in °C.

The formulas A through G were prepared according to the following procedure:

EXAMPLE 1

5

10

15

20

25

30

35

40

45

50

55

COMPOSITION	A	B	C	D	E	F	G
Water	30.5	27	19.38	25.31	40.7	35.71	33.03
Diethylene glycol butyl ether	39						
Triethylene glycol hexyl ether			32	32.5		28.57	33.94
Ethanol		15.33					
Propanol		30.67					
Dobanol 91-25					5.58		
Dobanol 91-5					8.37		
Heptyl acetate			35.7	16.875			
Nonyl acetate			11.9	16.875			
Decyl acetate	30.5						
Tridecyl acetate		27					
4-Heptanone							33.03
2-Undecanone						35.71	
Octane					42.84		
Glutaric acid				8.44			
Sodium benzoate			1.02				
Acetic acid 1M solution					0.37		
Isoerine diacetic acid, sodium salt					21.14		
Viscosity (25°C, 100 sec ⁻¹ , Pa. sec.)	7 x 10 ⁻³	4 x 10 ⁻³	8 x 10 ⁻³	1 x 10 ⁻²	5 x 10 ⁻³	8 x 10 ⁻³	6 x 10 ⁻³
Surface tension (mN/m)	25.8	25.1	25.5	26.5	21.3	26.5	25.9
Soil removal performance(*)							
Tar soil	xx	x	xxx	xx	xx	xxx	xxx
Greasy soil	xxx	xxx	xxx	xxx	xxx	xxx	xxx
Soap scum	xx	x	xx	xxx	xx	xx	xx

(*)The performance is estimated as the extent the soil is removed after having poured a few drops of the composition on the soil, let it work during about one minute without any mechanical action and rinsed it with water.

XXX = completely removed XX = partially removed X = hardly removed

Compositions A through G were made by first forming with mixing at room temperature a solution of the amphiphile and the water or the water and additive. To this solution at room temperature was added with mixing the non-polar solvent(oil) or weakly polar solvent to form the near tricritical point compositions A through G. The apparent viscosity measurements were made at 25°C on a Carrimed. The surface tension measurements were carried out at 25°C on a Lauda.

The invention has been described with respect to various embodiments and illustrations of it but is not to be considered as limited to these because it is evident that one of skill in the art with the present specification before him/her will be able to utilize substitutes and equivalents without departing from the invention.

The invention extends to a liquid cleaning composition having a surface tension of about 10 to 35 mN/m and incorporating at least a polar solvent, a water soluble or water dispersible low molecular weight amphiphile and a non-polar or weakly polar solvent and deriving from three co-existing liquid phases which are almost chemically identical to each other and said three co-existing liquid phases are in such a state that a minute variation of said state is able to convert them all into one single phase according to a reversible equilibrium, or to make them merging together into one continuum to form said composition wherein the first phrase is the

most abounding with the polar solvent, the second phase is the most abounding with the water soluble or water dispersible low molecular weight amphiphile and the third phase is the most abounding with the non-polar solvent or weakly polar solvent and the interfacial tension between said first phase and said second phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between second phase and third phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between first phase and third phase is 0 to about 1×10^{-3} mN/m.


The polar solvent may be water at a concentration of about 15 to about 85 wt %, the amphiphile may be an organic compound having a water insoluble hydrophobic portion which has a partial polar parameter and hydrogen bonding parameter, both of which are less than about 5 (MPa)^{1/2}, and a water soluble hydrophilic portion which has a partial hydrogen bonding solubility parameter greater than about 10 (MPa)^{1/2}; said amphiphile may be present at a concentration of about 5 to about 60 wt %; and said non-polar solvent or weakly polar solvent may have a dispersion solubility parameter greater than about 10 (MPa)^{1/2} and a hydrogen bonding solubility parameter of less than about 15 (MPa)^{1/2}, and said non-polar solvent or weakly polar solvent may be present at a concentration of about 15 to about 55 wt %.

The said low molecular weight amphiphile may be selected from the group consisting essentially of alkylene glycol alkyl ethers, polyoxyethylene derivatives having the formula:



wherein x or y is 1 to 6, polyols having about 4 to about 8 carbon atoms, polyamines having about 5 to about 7 carbon atoms, polyamides having about 5 to about 7 carbon atoms, and alkanols having about 2 to about 4 carbon atoms.

The said non-polar solvent or weakly polar solvent may be selected from the group consisting of alkanes and cycloalkanes having about 5 to about 25 carbon atoms, aryl alkanes having about 12 to about 24 carbon atoms, aliphatic and aromatic oils having about 6 to about 14 carbon atoms, terpenes having about 10 to about 40 carbon atoms, and esters having the formula:



wherein R and R₁ are alkyl groups having together about 7 to about 24 carbon atoms.

The said non-polar solvent or weakly polar solvent may be an aliphatic hydrocarbon having 6 to 16 carbon atoms and may be present in the composition at a concentration of 15 to 55 wt %.

The said polar solvent may be water and may be present in the composition at a concentration of 15 to 85 wt %.

The said composition may be sprayable by a hand operated pump sprayer.

A composition according to the invention may contain at least one solid particle and/or immiscible liquid.

The said non-polar solvent or weakly polar solvent may be an aliphatic hydrocarbon having about 6 to about 16 carbon atoms.

The said low molecular weight amphiphile may be triethylene glycol monohexyl ether.

According to another aspect of the invention there is provided a liquid cleaning composition having a surface tension of about 10 to 35 mN/m and incorporating at least a polar solvent, a water soluble or water dispersible surfactant and a non-polar or weakly polar solvent and deriving from three co-existing liquid phases which are almost chemically identical to each other and said three co-existing liquid phases which are almost chemically identical to each other and said three coexisting liquid phases are in such a state that a minute variation of said state is able to convert them all into one single phase according to a reversible equilibrium, or to make them merging together into one continuum to form said composition, wherein the first phase is the most abounding with the polar solvent, the second phase is the most abounding with the water soluble or water dispersible surfactant and the third phase is the most abounding with the non-polar solvent or weakly polar solvent, and the interfacial tension between said first phase and said second phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between second phase and third phase is 0 to about 1×10^{-3} mN/m and the interfacial tension between the first phase and the third phase is 0 to about 1×10^{-3} mN/m.

The composition may contain a surfactant and the said surfactant is preferably an anionic surfactant.

According to another aspect of the present invention there is provided a liquid cleaning composition having a surface tension of about 10 to 35 mN/m and incorporating at least a polar solvent, a water soluble or water dispersible low molecular weight amphiphile a non-polar or weakly polar solvent and a water soluble acid and deriving from three co-existing liquid phases which are almost chemically identical to each other and said three co-existing liquid phases are in such a state that a minute variation of said state is able to convert them all into one single phase according to a reversible equilibrium, or to make them merging together into one continuum to form said composition, wherein the first phase is the most abounding with the polar solvent, the second

phase is the most abounding with the water soluble or water dispersible low molecular weight amphiphile and the third phase is the most abounding with the non-polar solvent or weakly polar solvent and the water soluble acid is contained within the first phase the second phase and the third phase and the interfacial tension between said first phase and said second phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between second phase and third phase is a 0 to about 1×10^{-3} mN/m and the interfacial tension between first phase and third phase is 0 to about 1×10^{-3} mN/m.

The invention also extends to a process for treating materials soiled with soils to loosen or remove the soil which comprises applying to the locus of such soil on such material a soil loosening or removing amount of a composition in accordance with the present invention.

The composition may be applied as a pre-treatment to material soiled with hard-to-remove soil at the locus thereof on the material, after which application the soil is removed by application of water.

The composition may be applied as a pre-treatment onto dishes having deposits thereon before hand washing or such dishes in dishwater containing a dishwashing detergent composition.


The composition may be applied as a pre-spotting treatment onto laundry soiled with oily or greasy soils at the loci of such soils before washing of the laundry in wash water containing a laundry detergent composition.

The composition may be sprayed on a lipophilic soil on the surface, on which it remains as a surface adherent liquid until the soil is absorbed by it.

Claims

1. A liquid cleaning composition preferably having a surface tension of about 10 to 35 mN/m and incorporating at least a polar solvent, a water soluble or water dispersible low molecular weight amphiphile or a water soluble or water dispersible surfactant or a mixture of amphiphile and surfactant and a non-polar or weakly polar solvent, the proportions of polar solvent, amphiphile and/or surfactant and non-polar or weakly polar solvent being at or near the tricritical point for the said materials at which point the mixture exists as a single phase.
2. A composition as claimed in claim 1, characterised in that the polar solvent is water at a concentration of about 15 to about 85 wt %.
3. A composition as claimed in claim 1 or claim 2 characterised in that the amphiphile is an organic compound having a water insoluble hydrophobic portion which has a partial polar parameter and hydrogen bonding parameter, both of which are less than about $5 \text{ (MPa)}^{1/2}$, and a water soluble hydrophilic portion which has a partial hydrogen bonding solubility parameter greater than about $10 \text{ (MPa)}^{1/2}$; the said amphiphile being present at a concentration of about 5 to about 60 wt %.
4. A composition as claimed in claim 1, 2 or 3 characterised in that the said non-polar solvent or weakly polar solvent has a dispersion solubility parameter greater than about $10 \text{ (MPa)}^{1/2}$ and a hydrogen bonding solubility parameter of less than about $15 \text{ (MPa)}^{1/2}$; the said non-polar solvent or weakly polar solvent being present at a concentration of about 15 to about 55 wt %.
5. A composition as claimed in claim 1, 2, 3 or 4 characterised in that the said low molecular weight amphiphile is selected from the group consisting essentially of alkylene glycol alkyl ethers, polyoxyethylene derivatives having the formula:

$$\text{C}_x\text{H}_{2x+1} - \text{O} - (\text{CH}_2\text{CH}_2 - \text{O} -)_y - \text{H}$$
 wherein x or y is 1 to 6, polyols having about 4 to about 8 carbon atoms, polyamines having about 5 to about 7 carbon atoms, polyamides having about 5 to about 7 carbon atoms, and alkanols having about 2 to about 4 carbon atoms.
6. A composition as claimed in any one of claims 1 to 5 characterised in that the said non-polar solvent or weakly polar solvent is selected from the group consisting of alkanes and cycloalkanes having about 5 to about 25 carbon atoms, aryl alkanes having about 12 to about 24 carbon atoms, aliphatic and aromatic oils having about 6 to about 14 carbons atoms, terpenes having about 10 to about 40 carbon atoms, and esters having the formula:



- 5 wherein R and R₁ are alkyl groups having together about 7 to about 24 carbon atoms, or an aliphatic hydrocarbon having 6 to 16 carbon atoms.
7. A composition as claimed in any one of claims 1 to 6 characterised in that the said low molecular weight amphiphile is triethylene glycol monohexyl ether.
- 10 8. A composition as claimed in any one of claims 1 to 7 characterised in that the composition contains a surfactant and in that the said surfactant is an anionic surfactant.
9. A composition as claimed in any one of claims 1 to 8 characterised in that it contains a water soluble acid.
- 15 10. A method of making a liquid cleaning composition preferably having a surface tension of about 10-35 mN/m which comprises mixing first, second and third liquid phases to produce a single phase, the first phase containing polar solvent, the second phase containing a water soluble or water dispersible low molecular weight amphiphile or a water soluble or water dispersible surfactant or a mixture of amphiphile and surfactant and the third phase containing a non-polar or weakly polar solvent, the first phase being the most abounding with the polar solvent, the second phase being the most abounding with the water soluble or water dispersible low molecular weight amphiphile or surfactant and the third phase being the most abounding with the non-polar solvent or weakly polar solvent, the nature and proportions of the first, second and third phases being such that the interfacial tension between said first phase and second phase absent the third phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between second phase and third phase absent the first phase is 0 to about 1×10^{-3} mN/m, and the interfacial tension between first phase and third phase absent the second phase is 0 to about 1×10^{-3} mN/m.
- 20 25 30 11. A method as claimed in claim 10 characterised in that the polar solvent, the amphiphile or surfactant and the non-polar or weakly polar solvents are as claimed in any one of claims 1 to 9.

FIGURE 1

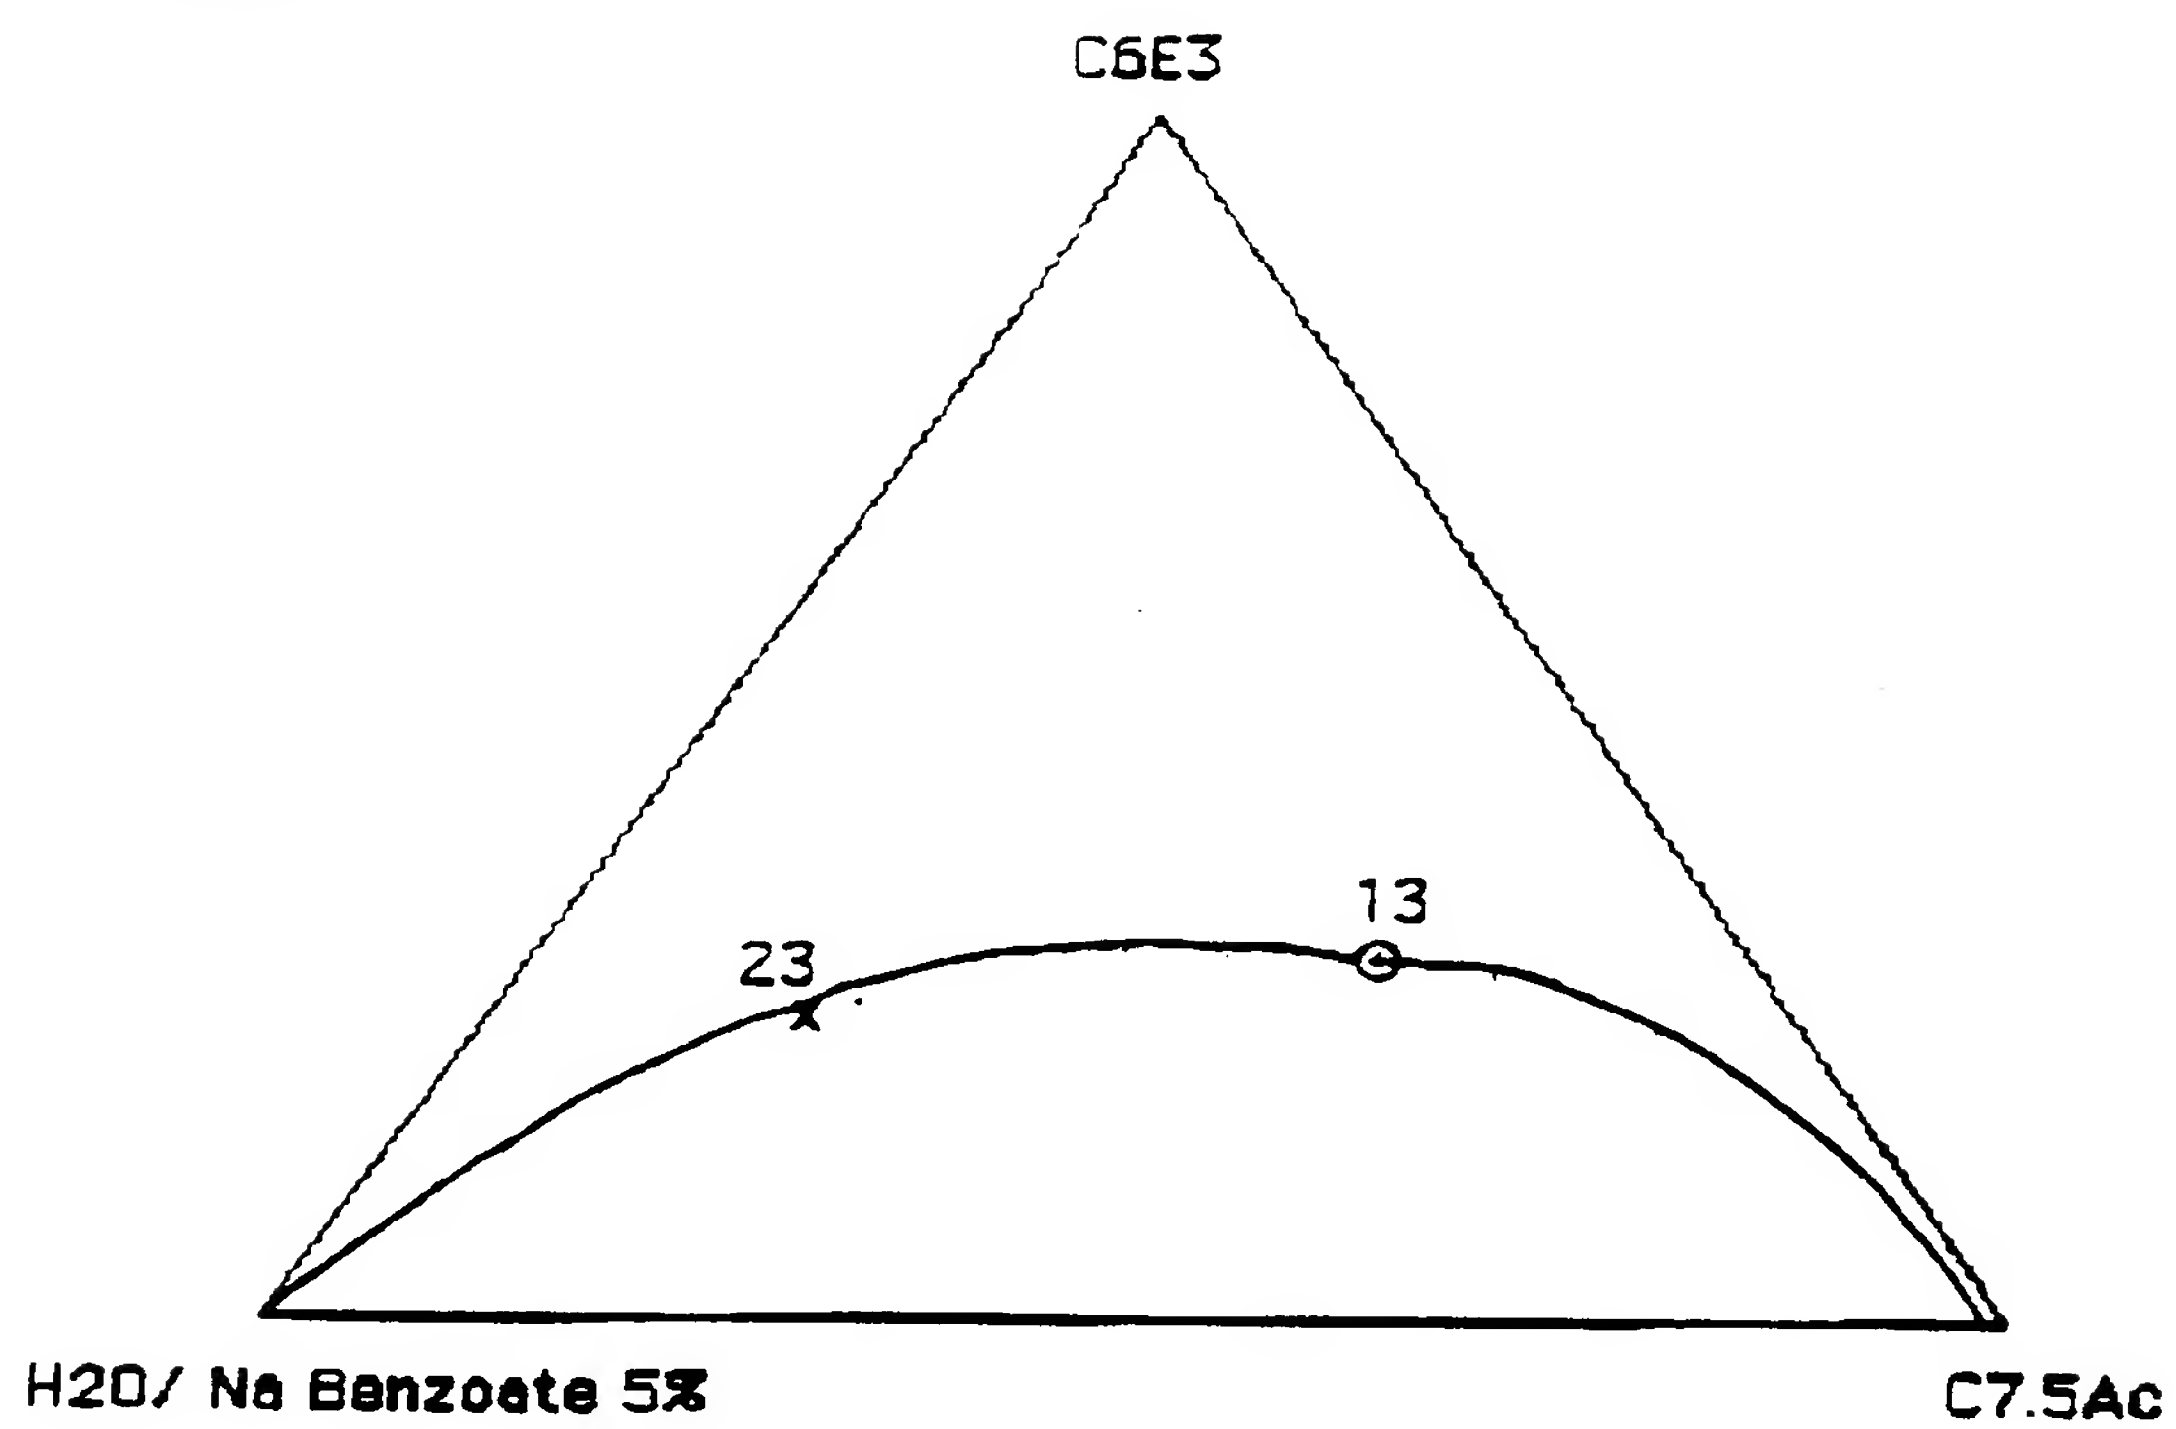


FIGURE 2

